

NS215 SURFACE MOUNT

Datasheet




TRU-COLOUR®

Product Codes


Unit:	Series:	Colour temp. (K):	Beam Angle (°):	Colour:	Control:	Version:
NS215	CR	3K (3000K)	36°	B (BLACK) W (WHITE)	PHASE (Phase Dimming)	1.0

Dimensions (mm)

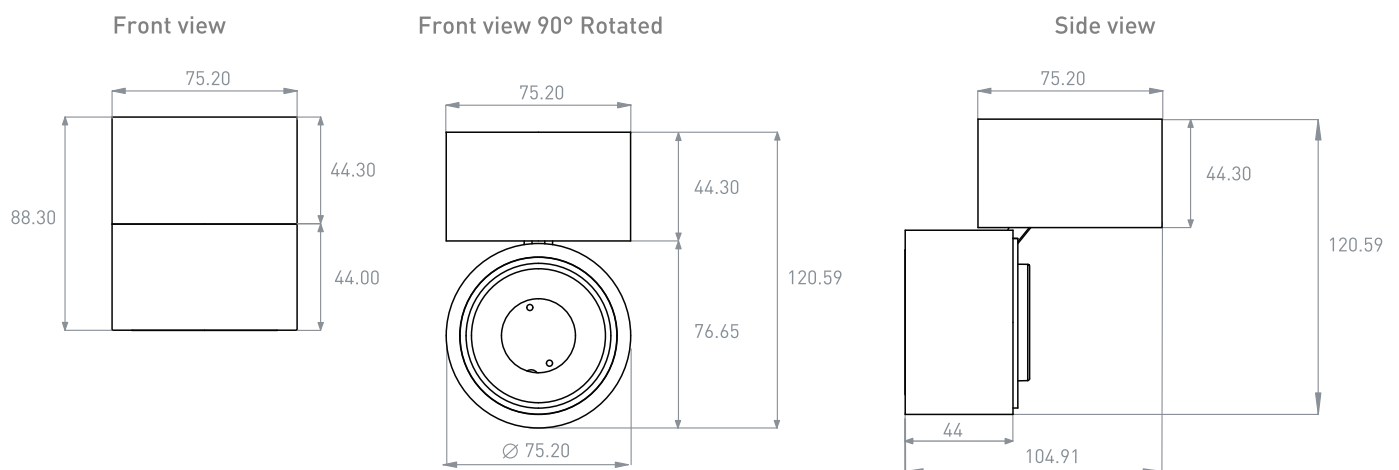

Photometrics

CCT: 2800K
Efficacy: 77lm/W
Delivered lumen output: 845lm
CRI: 98
Standard deviation of colour
Matching (SDCM): 2 MacAdam steps
Beam angle: 36°

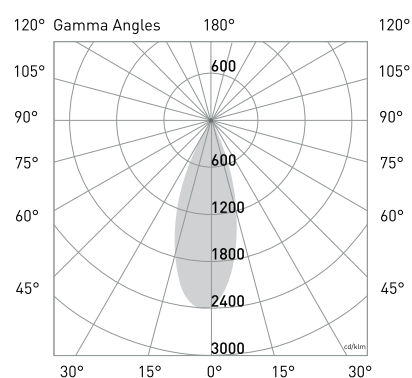


Electrical

Input Voltage: 240V	Power Usage: 11W	Current: 250mA	Driver power factor: >0.9	Dimmable: Yes	IP Rating: IP20	IK Rating: IK07
-------------------------------	----------------------------	--------------------------	-------------------------------------	-------------------------	---------------------------	---------------------------

Operational


Ambient temp.: -20°C to 40°C	Warranty: 5 Years	Lifetime: 50,000 hrs
--	-----------------------------	--------------------------------

Installation




Step 1

Unscrew one grub screw from the junction box of the luminaire housing to release the base plate and junction box.




Step 2

Thread the power cable through the base plate. Use the base plate as a guide to drill two pilot holes for the wall plugs.




Step 3

Once wall plugs have been pressed into the wall fasten the base plate to the wall using the screws provided.

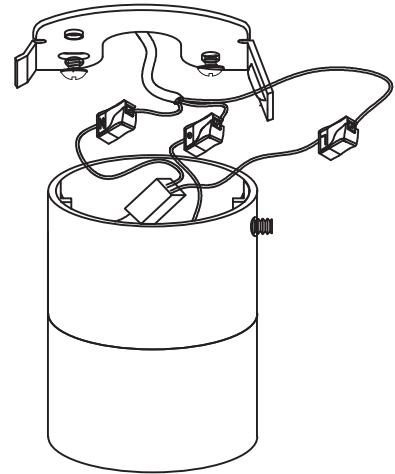


Step 4

Once wall plugs have been pressed into the wall fasten the base plate to the wall using the screws provided.

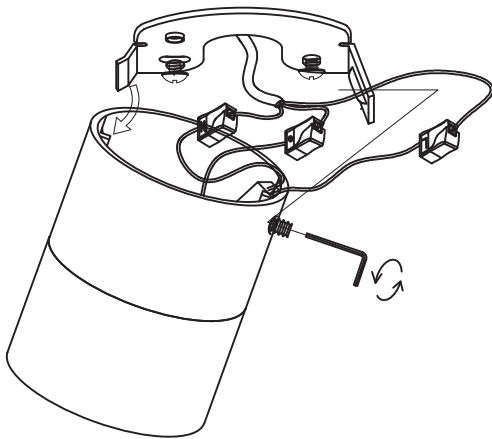

Step 5

Tilt the light body so that one end of the junction box snaps onto the base plate and secure by screwing the grub screw back in.



Step 6

Once the light is installed, orient the luminaire to focus the light as required.