

TLI-SPIKE



TECHNICAL

Materials of Optics	-
Materials of Housing	Aluminium
Light Source	MR16 - 3W/6W
Color Temperature	3000/4000/6000
Luminous Efficiency@4000K	k 80Lm/W
CRI	>85
Beam Angle(°)	40 °
UGR	-
Lifetime(hr)	40,000h
Product Finishing	Black

FEATURES & BENEFITS

LED Driver	24v driver sold separately
Dimming Option	Triac/ DALI/ 0-10V
Ingress Protection (IP Rating)	IP 65
Power Factor (PF)	≥0.9
Certification	SAA/RoHS/CE/CB


DATA SHEET

CODE TLI-SPIKE	WATTAGE	INPUT VOLTAGE	DIMENSION(mm)	LUMENS
	3W / 6W	DC 12-24V	Ø60X110x410	80lm/W

THE LIGHT IMPACT



OPTICS

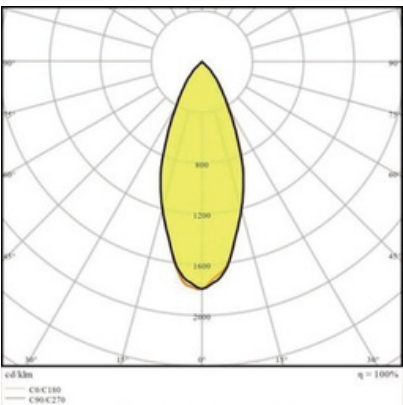

DIMENSIONS

