


TLI-TWIN-POLE-LITE

PRODUCT PARAMETERS

Product model	Size	Colour temperature	Power	Input Voltage
TLI-TWIN-POLE-LITE	" See Diagram Below"	3000k, 5000k	2 X 6W	12V AC DC RETRO 240V

MECHANICAL SPECIFICATIONS

IP Rating	IP56
Dimming Options	No
Operating Temperature	-15c -45c
Colour	Solid Copper or 316 Stainless Steel
Construction Material	Solid Copper or 316 Stainless Steel
Voltage	12V, RETRO 240V

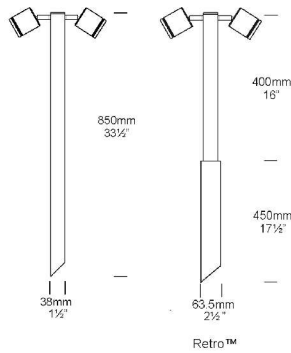

PHOTOMETRIC INFORMATION


Typical Light Source Efficacy	1050lm
CCT Colour Temperatures	3000k, 5000k
Colour Rendering Index (CRI)	80
Beam Angle	15, 25, 38, 60 degrees



Mounting

The pole 800mm (31 1/2") is directly mounted into the earth or concrete. Flange Mount option is available for hard surfaces.

ACCESSORIES



SPECIFICATIONS ABOVE ARE FOR REFERENCES ONLY AND MAY VARY WITHOUT PRIOR NOTICE