

TLI-S40

INTRODUCTION

S40 is the first profile lighting solution to feature flicker free dimming capabilities. Available in both DALI and Phase.


Recessed directional lenses and additional low glare coatings ensure profound visual comfort and continuous imaging. A unique, seamless and continuous design for pendant and surface mounted options also achieves 0% light leak.

PRODUCT PARAMETERS

Product model:	Size:	Colour Temperature:	Power:	Input Voltage:
TLI-S40	"See Diagram"	3000k, 4000k	10, 20, 30W/m	AC220-265V





MECHANICAL SPECIFICATIONS

IP Rating: IP44
 Dimming Options: ND, Phase, Dali, 010V
 Operating Temperature: -30 to 85°C
 Inner Colour: Black
 Outer Colour: Black, Silver, White
 Construction Material: Aluminium
 Warranty: 7 Years of Luminaire Warranty & 5 Years of Driver Warranty

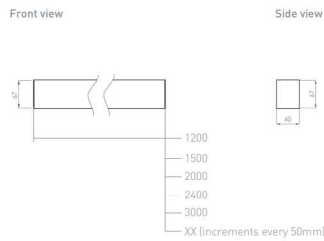

PHOTOMETRIC INFORMATION

CCT Colour Temperatures: 3000k, 4000k
 Lumens: 3000k: 80lm/W 4000k: 91lm/W
 Colour Rendering Index (CRI): 95+
 Beam Angle / Viewing Angle: WF60°, AS40°, BW40°, DF180°

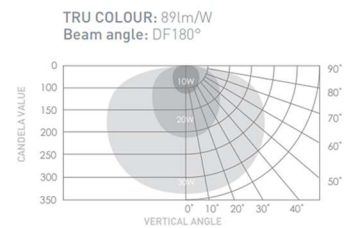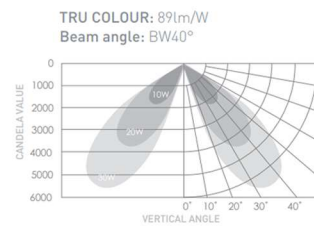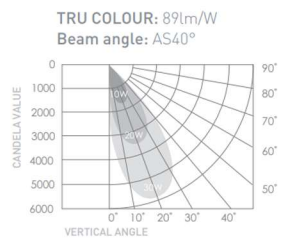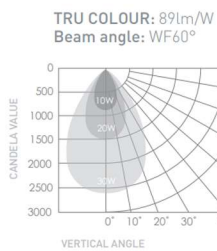

SPECIFICATIONS ABOVE ARE FOR REFERENCES ONLY AND MAY VARY WITHOUT PRIOR NOTICE