




DIMENSION

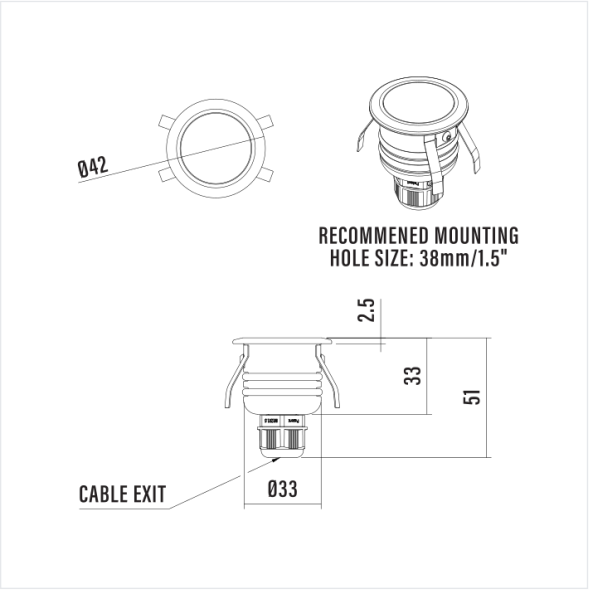

INTRODUCTION

The AQL-153 is a mini in-ground uplight designed for secure installation and resilience under foot traffic. Featuring spring clips and a robust front element, this fixture is engineered for ground-level architectural lighting.

CNC machined from 6000 series aluminium or brass, this IP65-rated fixture features a 2W LED source delivering 200 lumens. It operates on 24V DC control gear with a 2-core anti-siphon cable.

GENERAL DATA	
Product Code	AQL-153
Construction	CNC Machined Aluminium
Warranty	7 Years
Country of Manufacture	Australia

POWER SUPPLY DATA	
Voltage	24V DC
Frequency	-
Flicker free	Yes.
Dimming	Yes. Direct PWM.
Max. qty of fixtures C16 Breaker	PSU Dependant

LIGHT SOURCE DATA	
CRI (3000K)	90+
SDCM	3

PERFORMANCE DATA	
LED Lifetime	L80 B10 70,000h (Ta 25C)
Operating temperature range	0C - 40C
IP Rating	IP65
IK Rating	IK04
Weight	0.2kg
Power cable	2-Core Anti-Siphon Cable
Electrical insulation class	Class II

COMPLIANCE DATA	
Compliance / Certifications	SELV
Environmental certifications	IP IK



PRODUCT OPTIONS

Body	Aluminium - Clear Aluminium 6000 Series
	Aluminium - Black Aluminium 6000 Series
	Aluminium - Medium Bronze Aluminium 6000 Series
	Aluminium - Basalt Aluminium 6000 Series
	Aluminium - White Aluminium 6000 Series
	Aluminium - Clear Anodized Aluminium - Clear Anodized
	B1 - Brushed Chrome Brass
	B3 - Aged Brass Brass
	B5 - Brushed Copper Brass
	B6 - Natural Waxed Brass
Control Gear	24V DC, 2-Wire Dimming
Optical	25° Beam
	35° Beam
	50° Beam
	Diffused
Cable	Anti-siphon Cable

PRODUCT IMAGES

