




DIMENSION

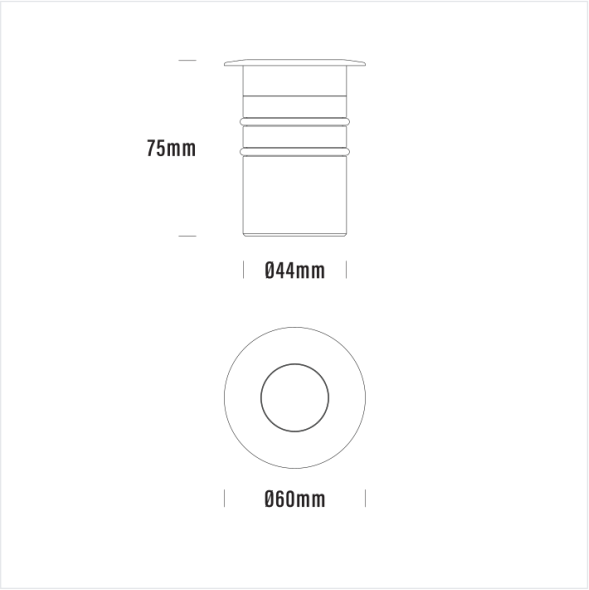

INTRODUCTION

The AQL-154 is an inground uplight featuring a deeply recessed light source for discrete illumination. It is designed for uplighting applications where glare control is a priority.

CNC machined from 6000 series aluminium or brass, this IP65-rated fixture features anti-siphon cabling. Technical specifications include 24V DC control gear, 15-degree or 30-degree optics, and 4W or 10W LED light sources.


GENERAL DATA	
Product Code	AQL-154
Construction	CNC Machined Aluminium
Warranty	7 Years
Country of Manufacture	Australia

POWER SUPPLY DATA	
Voltage	24V DC
Frequency	-
Flicker free	Yes.
Dimming	Yes. Direct PWM.
Max. qty of fixtures C16 Breaker	PSU Dependant

LIGHT SOURCE DATA	
CRI (3000K)	90+
SDCM	3

PERFORMANCE DATA	
LED Lifetime	L80 B10 70,000h (Ta 25C)
Operating temperature range	0C - 40C
IP Rating	IP65
IK Rating	IK04
Weight	0.2kg
Power cable	2-Core Anti-Siphon Cable
Electrical insulation class	Class II

COMPLIANCE DATA	
Compliance / Certifications	SELV
Environmental certifications	IP IK



PRODUCT OPTIONS

Body	 Aluminium - Clear Aluminium 6000 Series
	 Aluminium - Black Aluminium 6000 Series
	 Aluminium - Medium Bronze Aluminium 6000 Series
	 Aluminium - Basalt Aluminium 6000 Series
	 Aluminium - White Aluminium 6000 Series
	 B1 - Brushed Chrome Brass
	 B2 - Black Brass
	 B3 - Aged Brass Brass
	 B5 - Brushed Copper Brass
	 B6 - Natural Waxed Brass
Control Gear	24V DC, 3-Wire Dimming Constant Current 24V DC, 2-Wire Dimming
Optical	15° Beam 30° Beam
Cable	Anti-siphon Cable Standard Cable

PRODUCT IMAGES

