

W700.SHIP Curve LED Wall Light

Datasheet




TRU-COLOUR®

Product codes


Unit: W700.SHIP	Series: CR	Colour temp.: 2.7K (2700K) 3K (3000K) 4K (4000K)	Beam angle (°): 36 (36°)	Colour: W (White) B (Black) BRO (Bronze) (RAL8025)	Driver: PHASE (PHASE)	Version: 1.0
---------------------------	----------------------	--	------------------------------------	---	---------------------------------	------------------------

Dimensions (mm)

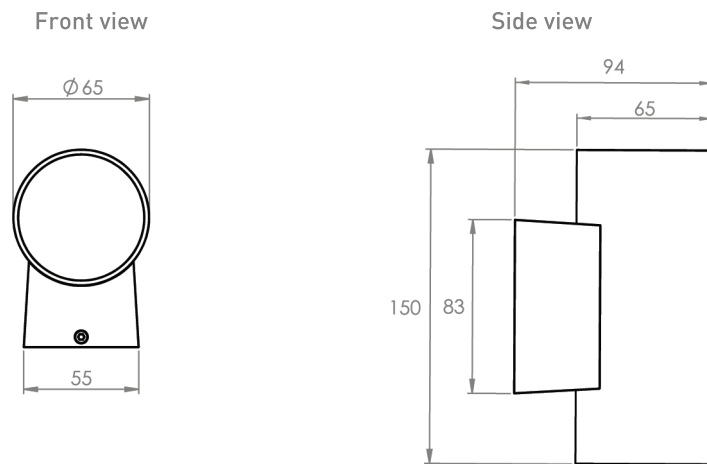


Photometrics


Source lumen output: 705lm
Delivered lumen: 560lm
Efficacy: 94lm/W
Colour temp.: 2700K
Beam angle: 36°
CRI: >98
Standard deviation of colour matching (SDCM): 3 Macadam steps

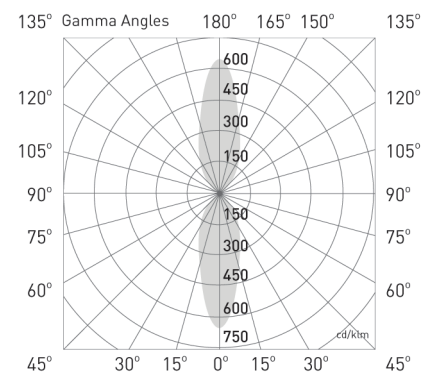

Source lumen output: 715lm
Delivered lumen: 575lm
Efficacy: 96lm/W
Colour temp.: 3000K
Beam angle: 36°
CRI: >98
Standard deviation of colour matching (SDCM): 3 Macadam steps

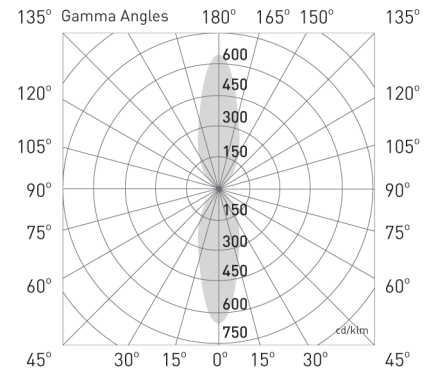

Source lumen output: 730lm
Delivered lumen: 585lm
Efficacy: 97lm/W
Colour temp.: 4000K
Beam angle: 36°
CRI: >98
Standard deviation of colour matching (SDCM): 3 Macadam steps

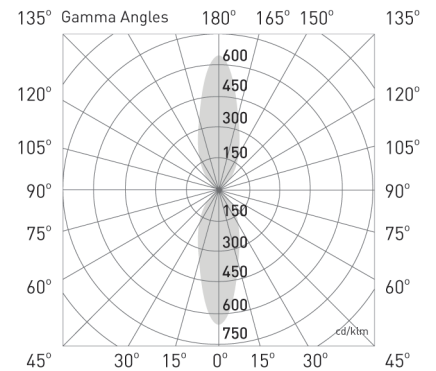

Electrical

Input voltage: 220-240V	Power usage: 6W	Driver power factor: 0.6	IP rating: IP65	Surge protection: 3100V	Dimmable: Yes
-----------------------------------	---------------------------	------------------------------------	---------------------------	-----------------------------------	-------------------------


Operational

Lifetime L70, B10: 50,000 hrs (@TA25)	Thermal rating: IC-4	SDCM: 3MacAdam Steps
---	--------------------------------	--------------------------------

Physical


Warranty: 7 years	Mounting type: Surface
-----------------------------	----------------------------------

Installation




Step 1

Unscrew the two grub screws from the top and bottom of the luminaire housing to release the base plate and junction box.




Step 2

Thread the power cable through the base plate. Use the base plate as a guide to drill two pilot holes for the wall plugs.




Step 3

Once wall plugs have been pressed into the wall fasten the base plate to the wall using the screws provided.




Step 4

Connect the mains power cable to the terminal block.



Step 5

Position the luminaire housing back to the base plate and secure by putting back the grub screws.



Step 6

Installation complete