

W100.IP Cube LED Wall Light

Datasheet




TRU-COLOUR®

Product codes


Unit:	Series:	Colour temp.:	Beam angle (°):	Colour:	Driver:	Version:
W100.IP	CB	2.7K (2700K) (Special Order) 3K (3000K)	DF (Diffused)	W (White) B (Black) BRO (Bronze) (RAL8025)	PHASE (PHASE) DALI (DALI) ZIGBEE (ZIGBEE)	1.0

Dimensions (mm)


Front view

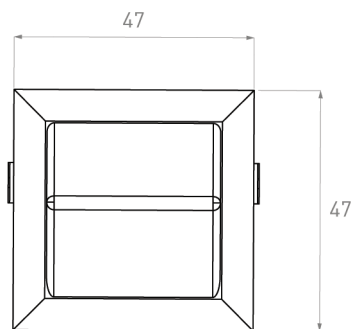

Side view

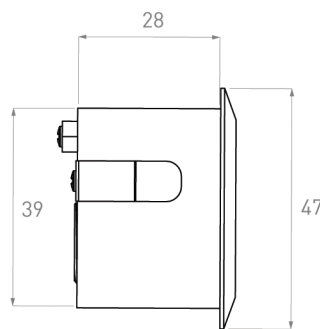


Hole Cutout



Photometrics

Source lumen output: 110lm
Delivered lumen: 80lm
Efficacy: 78lm/W, 80lm/W
Colour temp.: 2700K, 3000K
Beam angle: DF
CRI: >98
Standard deviation of colour matching (SDCM): 2 Macadam steps

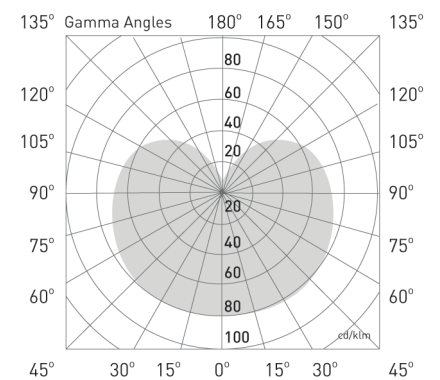

Electrical

Input voltage:
24V

Power usage:
1W

Driver power factor:
>0.9

IP rating:
IP65

Dimmable:
Yes

Operational

Ambient Temp.:
-20°C to 50°C

Lifetime:
70,000 hrs

SDCM:
2MacAdam Steps

Physical

Warranty:
7 years

Mounting type:
Recessed