


DIMENSION

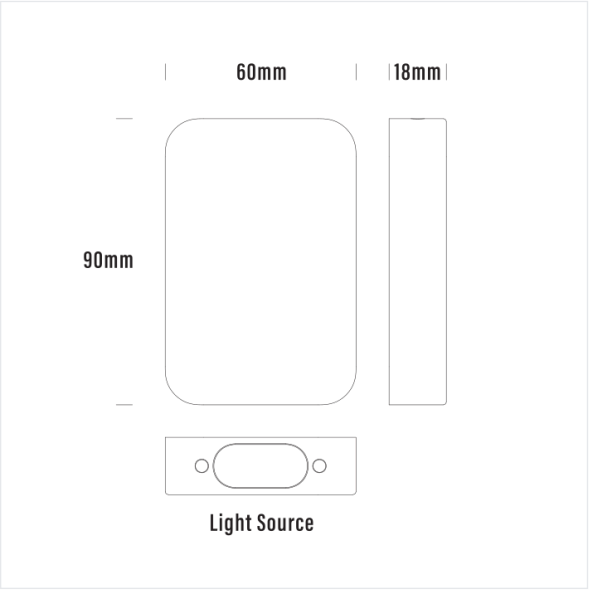

INTRODUCTION

The AQL-514 is a slimline 60mm grazing light designed for steps, corridors, and general wayfinding. Its minimal design is suitable for both interior and exterior applications.

Built from CNC machined brass or 6000 series aluminium, this IP65-rated fixture operates on a 24V DC system. It features a 2W output with diffused optics and a 500mm silicone/PTFE cable.

GENERAL DATA	
Product Code	AQL-514
Construction	Brass / CNC Machined Aluminium
Warranty	7 Years
Country of Manufacture	Australia

POWER SUPPLY DATA	
Voltage	24V DC
Frequency	-
Flicker free	Yes.
Dimming	Yes. Direct PWM.
Max. qty of fixtures C16 Breaker	PSU Dependant

LIGHT SOURCE DATA	
CRI (3000K)	90+
SDCM	3

PERFORMANCE DATA	
LED Lifetime	L80 B10 70,000h (Ta 25C)
Operating temperature range	0C - 40C
IP Rating	IP65
IK Rating	IK04
Weight	0.2kg
Power cable	2-Core Anti-Siphon Cable
Electrical insulation class	Class II

COMPLIANCE DATA	
Compliance / Certifications	SELV
Environmental certifications	IP IK

PRODUCT OPTIONS

- Body
- Aluminium - Clear

Aluminium 6000 Series

Aluminium - Black

Aluminium 6000 Series

Aluminium - Medium Bronze

Aluminium 6000 Series

Aluminium - Basalt

Aluminium 6000 Series

Aluminium - White

Aluminium 6000 Series

B1 - Brushed Chrome

Brass

B3 - Aged Brass

Brass

B5 - Brushed Copper

Brass

B6 - Natural Waxed

Brass

Control Gear

24V DC, 2-Wire Dimming

Optical

Diffused

Cable

Standard Cable

PRODUCT IMAGES

