




DIMENSION

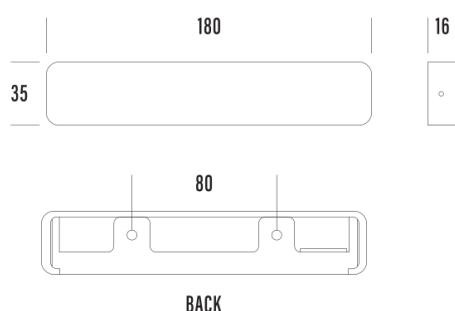

INTRODUCTION

The AQL-517 is a slimline, reduced-height surface grazing light designed for stair-tread and wayfinding applications.

CNC machined from solid brass or 6000 series aluminium, this IP65-rated fixture features an etched glass diffuser and a 500mm two-core cable. It operates on a dimmable 24V DC system, utilizing a 2W LED engine available in 2700K, 3000K, or 4000K color temperatures.

GENERAL DATA

Product Code	AQL-517
Construction	Brass / CNC Machined Aluminium
Warranty	7 Years
Country of Manufacture	Australia

POWER SUPPLY DATA

Voltage	24V DC
Frequency	-
Flicker free	Yes.
Dimming	Yes. Direct PWM.
Max. qty of fixtures C16 Breaker	PSU Dependant

LIGHT SOURCE DATA

CRI (3000K)	90+
SDCM	3

PERFORMANCE DATA

LED Lifetime	L80 B10 70,000h (Ta 25C)
Operating temperature range	0C - 40C
IP Rating	IP65
IK Rating	IK04
Weight	0.2kg
Power cable	2-Core Anti-Siphon Cable
Electrical insulation class	Class II

COMPLIANCE DATA

Compliance / Certifications	SELV
Environmental certifications	IP IK

PRODUCT OPTIONS

- Body
- Aluminium - Clear

Aluminium 6000 Series

Aluminium - Black

Aluminium 6000 Series

Aluminium - Medium Bronze

Aluminium 6000 Series

Aluminium - Basalt

Aluminium 6000 Series

Aluminium - White

Aluminium 6000 Series

B1 - Brushed Chrome

Brass

B3 - Aged Brass

Brass

B5 - Brushed Copper

Brass

B6 - Natural Waxed

Brass

Control Gear	24V DC, 2-Wire Dimming
Optical	Diffused
Cable	Standard Cable

PRODUCT IMAGES

